




ROPE MANURE SCRAPER EL-120


TECHNICAL DATA:

- 3-phase power supply 400 V;
- drive stations power - 0.9 kW / 1.1 kW;
- stainless steel rope 10 mm;
- manure removal speed from 4 to 6 m/ min;
- manure chanel maximum length:
120 meters for barns without straw;
30 meters for barns with straw;
- channel width - 120 ÷ 600 cm;
- corrosion protection - powder coated;
- drive station permissible load - 1800 kg.

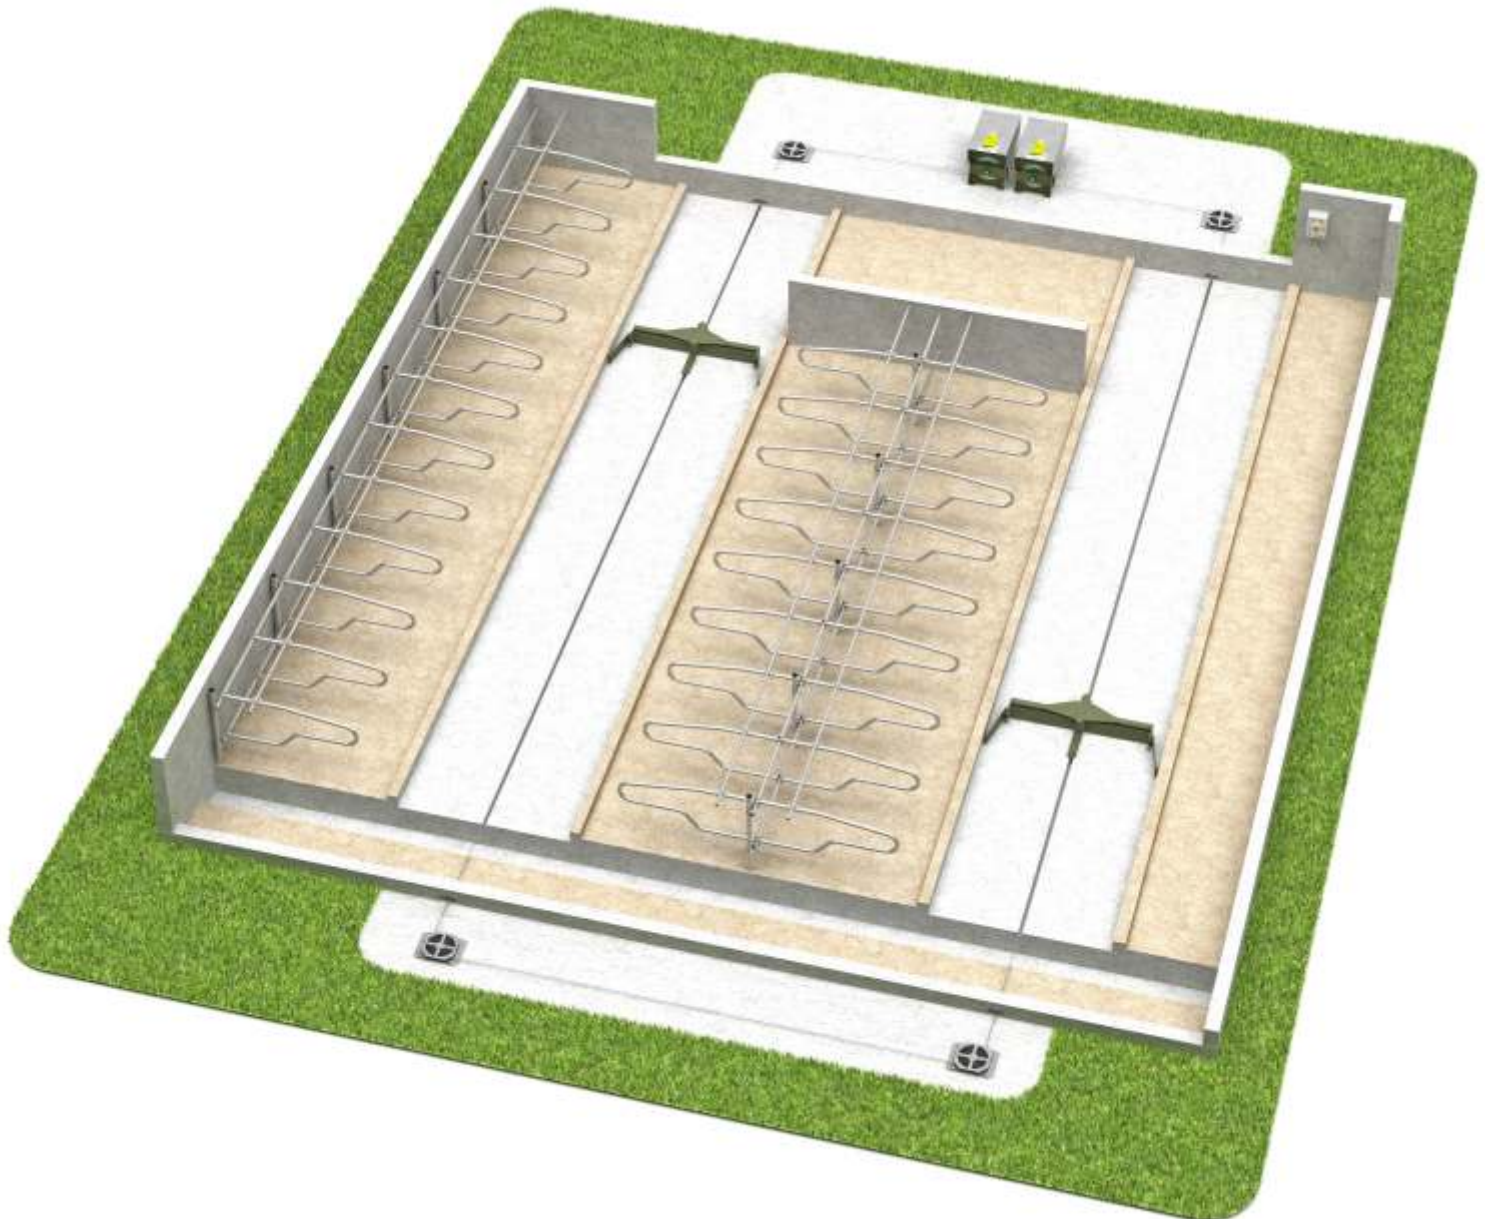



SYSTEM ELEMENTS

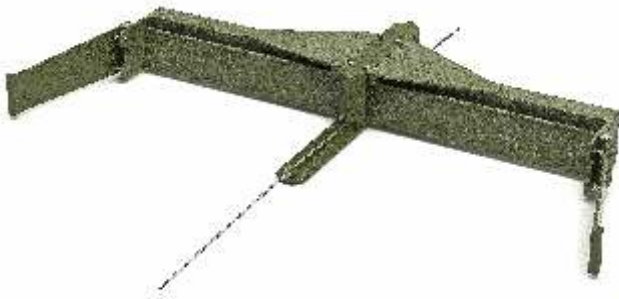

Scraper arm - rigid



Scraper arm - articulated



Drive station



Cover for horizontal corner roller




Horizontal corner roller



Vertical corner roller



Main control box




Supplementary control box (option)




USAGE EXAMPLES LINER EL-120

Double-row system with central dumping channel, version with scraper arm - articulated

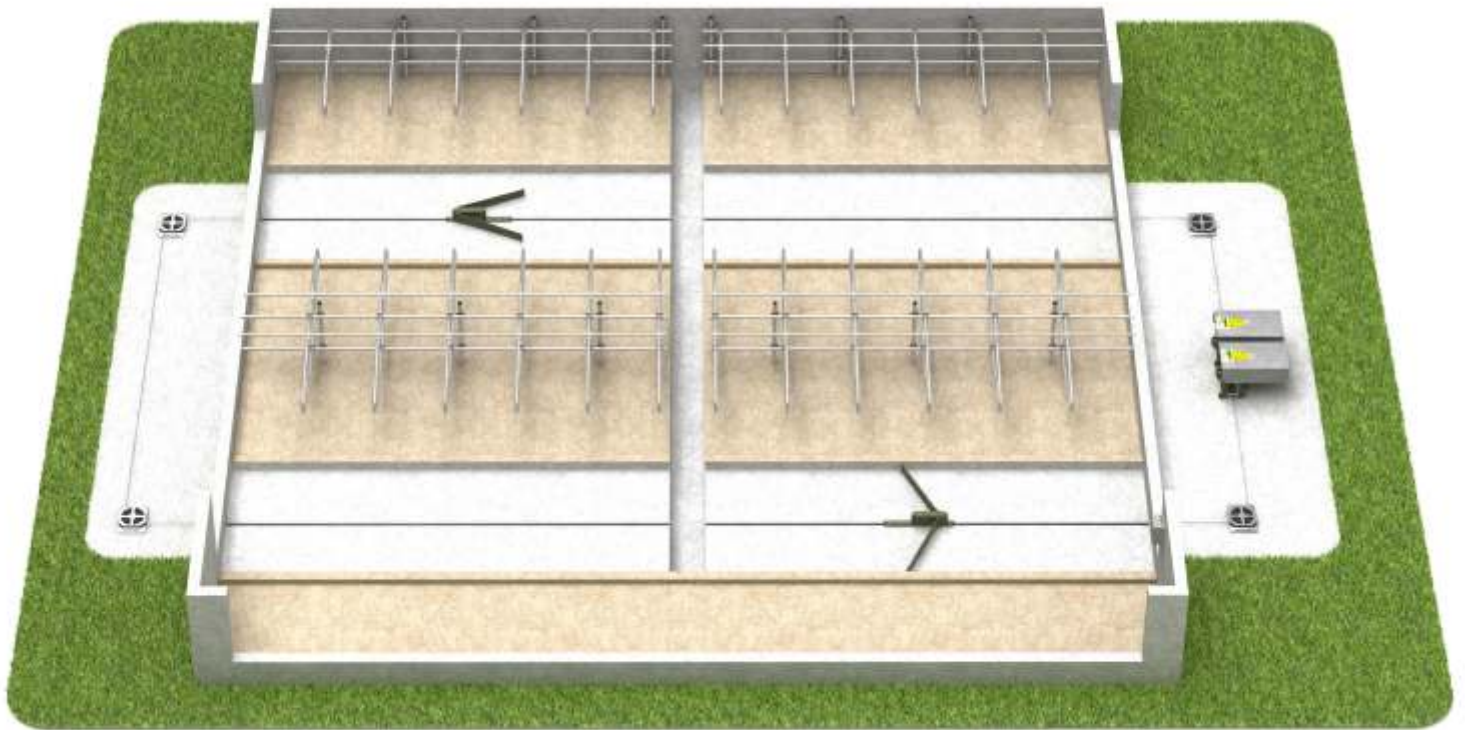


Double-row system with central dumping channel, version with scraper arm - rigid

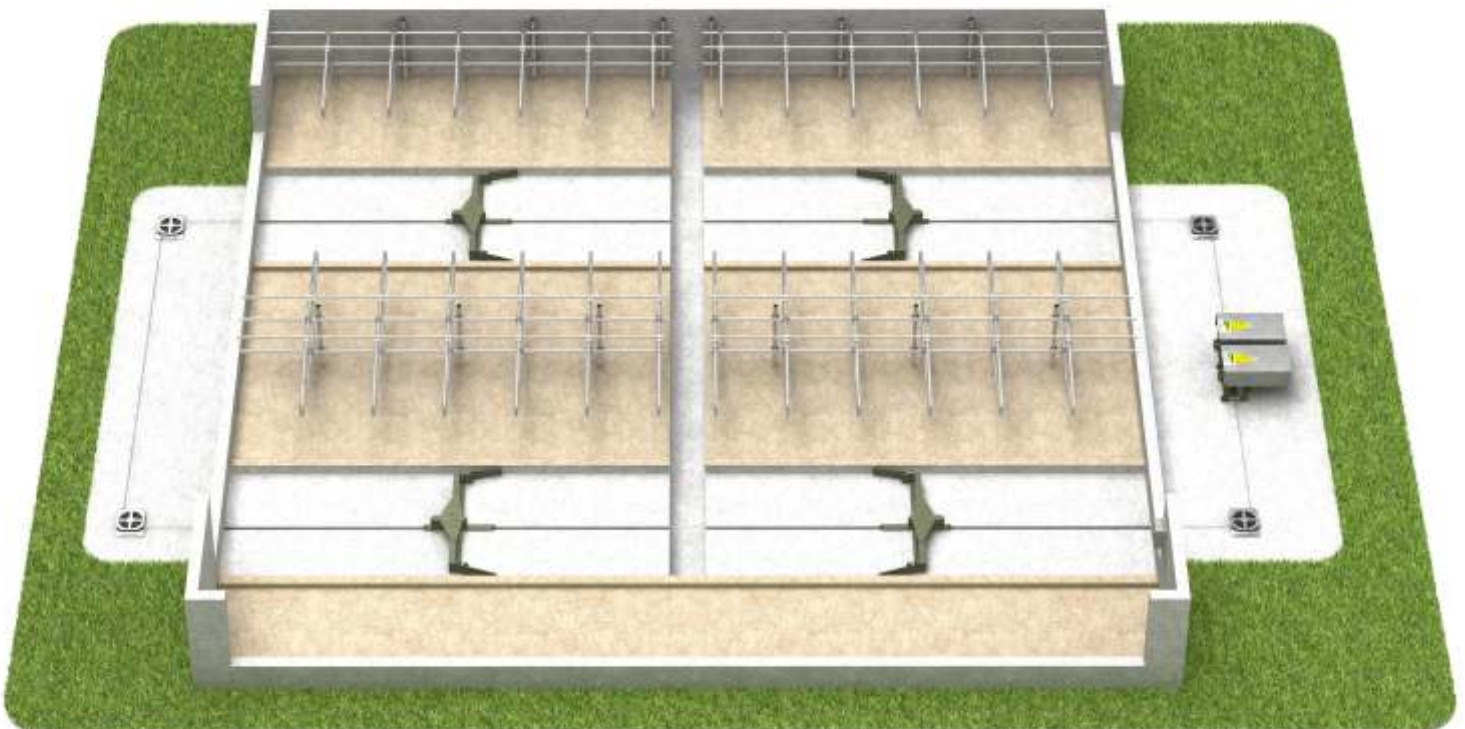



Triple-row system with dumping channel in the end

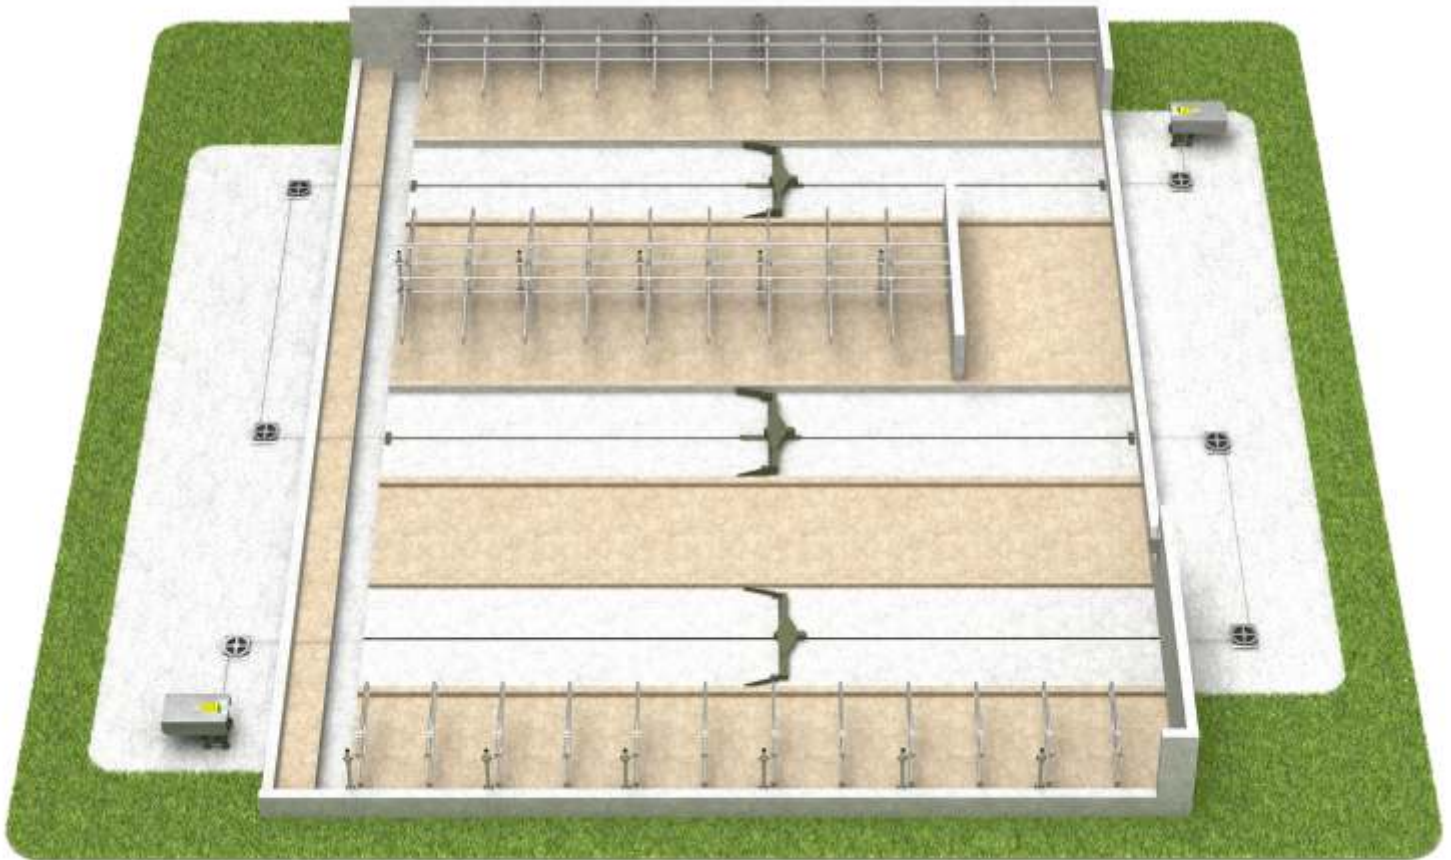

Single row system with dumping channel in the end

